

Shree  
**Vasudha**™  
GEL EARTHING ELECTRODE



SAVIOUR  
**SAVIOUR**  
OF YOUR VALUABLE

**AIDITEC**  
SYSTEMS

Innovative Technologies in Lighting Protection  
Made in Spain

## V-ECO<sup>TM</sup> SERIES

Eco Earthing

- Strip In Pipe Design
- Crystalline Material Filled
- Available in GI, Copper Bonded and Copper
- Designed for fast fault current dissipation



MODEL No.	LENGTH (MM)	OUTER DIA (MM)	INTERNAL STRIP	TERMINAL POINT
VECO 19/1	1000	46 - 50	25X8	12
VECO 19/2	2000	46 - 50	25x8	12
VECO 19/3	3000	46 - 50	25x8	12
VECO 39/2	2000	76 - 80	65x8	14
VECO 39/3	3000	76 - 80	65x8	14

## HD Series

- Strip In Pipe Design
- Crystalline Material Filled
- 80 to 120 m Hot-Dip Galvanizing for better life
- up to 255 m copper bonding available in copper bonded electrode
- With **EXtra PLUS** Backfill Compound



MODEL No.	LENGTH (MM)	OUTER DIA (MM)	INTERNAL STRIP	TERMINAL POINT
VHD 19/2	2000	46 - 50	38x6	12
VHD 19/3	3000	46 - 50	38x6	12
VHD 39/2	2000	76 - 80	50x10	14
VHD 39/3	3000	76 - 80	50x10	14

**NOTE :** The Size and Numbers of Earthing Electrodes should be Recommended by your electrical consultant, engineers and contractors, depending on your infrastructure requirements. Ohmic Value depends upon the soil and site conditions where ever it has to be used. Mentioned specification can be changed at any time for the development of the product.

# PRO SERIES

- Pipe In Pipe Design
- Crystalline Material Filled
- Available in GI, HD GI and Copper Bonded
- With **Extra Plus** Backfill Compound
- Designed for fast fault current dissipation




MODEL No.	LENGTH (MM)	OUTER DIA (MM)	INTERNAL DIA (MM)	TERMINAL POINT
VPR 19/2	2000	46 - 50	25	12
VPR 19/3	3000	46 - 50	25	12
VPR 39/2	2000	76 - 80	38	14
VPR 39/3	3000	76 - 80	38	14

# SMART SERIES

- Crystalline Material Filled
- Designed for fast fault current dissipation
- Available in GI and Copper Bonded
- Value for Money

MODEL No.	LENGTH (MM)	OUTER DIA (MM)	TERMINAL POINT
VSMT 19/2	2000	46 - 50	12
VSMT 19/3	3000	46 - 50	12
VSMT 39/2	2000	76 - 80	14
VSMT 39/3	3000	76 - 80	14

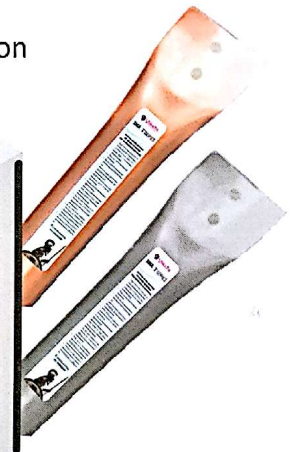

## Coper Bonded Rods & FRP Earth Pit Covers

- Copper Bonded Rods meeting International Standards for Earthing
- Excellent electrical conductivity and corrosion resistance
- Designed specifically for Earthing Inspection.
- Durable mild FRP cover and body.
- Solid Tray base.






## Extra PLUS

- It is Specifically developed for dry condition
- It captures moisture from the surrounding environment and retains it for long life.
- Available in 12.5 kgs. Packing



- It is an ideal back fill compound
- It Reduces the soil resistivity and helps to retain moisture
- Available in 25 kgs. Packing
- Best for normal soil condition

### OUR CLIENTS



Dealers: **ಮಿಂಚು**  
**Minchu**  
 Solutions for Electrical Safety  
 Contact : 8105733339 Email : minchu1.org@gmail.com

